

# Ampatex® Variano

Moisture-variable vapour check and airtight layer



**NEW**



- Ideal  $s_D$  value spread: 0,4 m – 6,0 m
- Soft material, easy to process
- Easy to apply, thanks to the top polyamide layer
- Two types of applications: internal work and roof renovation from outside

Technical details		Value	Standard
$s_D$ Value		0,4 m – 6 m	EN 1931
Weight		140 g / m <sup>2</sup>	EN 1849-2
Tear resistance	longitudinal	150 N/5 cm	EN 12 311-2/A
	transverse	150 N/5 cm	
Tear elongation	longitudinal	≥300 %	EN 12 311-2/A
	transverse	≥300 %	
Resistance to further tearing (nail shaft)	longitudinal	85 N	EN 12 310-1
	transverse	95 N	
Fire behaviour		E	EN 13 501-1
Fireclass		5.2	VKF
Waterproofing (at 2 kPa)		passed	EN 1928
Width of overlap		10 cm	
Straightness		<75 mm/10 m	EN 1848-2
Temperature resistance		-40 bis +80°C	
Water vapour resistance after ageing		passed	EN 1296

**10**  
 Jahre Garantie  
 Ans Garantie  
 Anni Garanzia  
 Years Warranty

Security is part of the system at Ampack. We cover the cost of removal and replacement, and consequential damage, as well as the replacement materials.


**CE**  
 EN 13984

**ISO 9001:2008**  
 Swiss Research

**Areas of application:** Ideal for use in dry internal work. Also suitable for roof renovation from the outside.

## Forms of delivery

Article number	Description	Roll dimensions	Content of pallets
7640115536051	Ampatex® Variano with 60 m Ampacoll® INT	1,5 m × 50 m = 75 m <sup>2</sup>	32 rolls = 2'400 m <sup>2</sup>

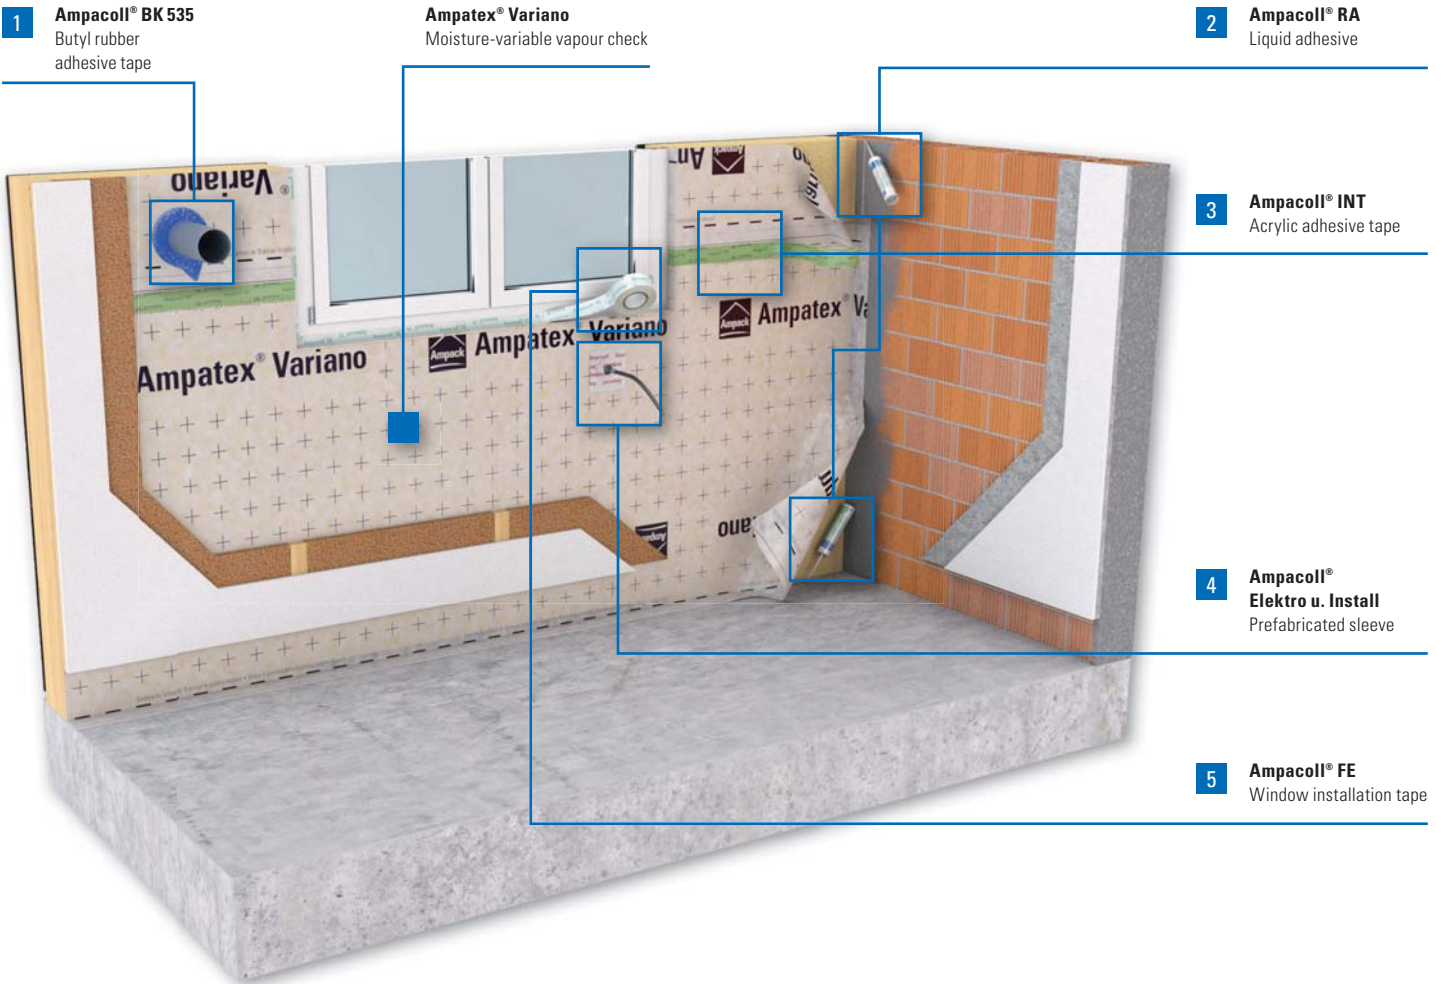

### Tips for laying

**Ampatex® Variano** is applied as an airtight layer and vapour check for dry interior finishing and positioned on the warm side of the thermal insulation where it is stapled to the construction. Take care when positioning it that the membranes overlap by 10 cm and that

the joints are tightly sealed with the adhesive strip **Ampacoll® INT** dicht abgeklebt werden. Edge connections must be sealed with **Ampacoll® BK 530** or **Ampacoll® RA**. Porous or dusty surfaces must be pre-treated with **Ampacoll® Connecto**. Penetrations such as ventilation

and electric pipes must be permanently sealed with **Ampacoll® BK 535**.



Note the application guidelines and other system products in our adhesive matrix




For more detailed information and documents see [www.ampack.eu](http://www.ampack.eu)



For any questions regarding applications Tel.: + 41 (0)71 858 38 00 Fax: + 41 (0)71 858 38 37

Sales through dealers



**www.ampack.eu**  
 Ampack Switzerland: 071 858 38 00  
 Ampack Austria: 05523 53 433  
 Ampack Germany: 07351 19 81-0  
 Ampack France: 0381 39 20 45  
 Ampack Italy: 0471 053 475

